



## Reason why

This is the new CF datalogger able to interpose itself between any measuring instrument with a 4-20 mA signal and your command line to read and acquire the data easily through your PC or your SMARTPHONE. This new FOX's product transforms each din30x30 connector into a source of data to be saved and analyzed.

## Retrofittabile

This new CF datalogger can be mounted on new or already installed measuring instrument with a 4-20 mA signal.

## Main technical data



- **Operating temperature:**  $-25^{\circ}\text{C} \div +85^{\circ}\text{C}$
- **Input and Output Signal:** 4 - 20 mA
- **Input and Output Connections:** DIN43650 [M3 - "30x30"] connector
- **Connection for reading and recording data from smartphone and PC:** Micro-USB type B with OTG cable
- **Accuracy:**  $\pm 3\%$  of full scale at  $20^{\circ}\text{C}$
- **Compatible with:** Windows and Android



Mounted on FOX model: TR4



Mounted on FOX model: TT4

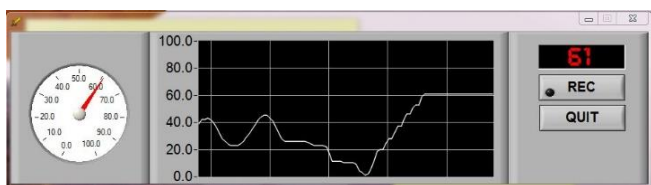

Esecuzione/ execution	<b>4-20 mA</b> <b>2fili / 2wires</b>
Tensione alimentaz./ Power supply	V DC Stabilizzata
Pin 1	Alimentazione + Power supply +
Pin 2	Segnale/signal 4-20mA
Pin 3	/
Pin T	/