


THERMOSTAT TM47C1/DT062S

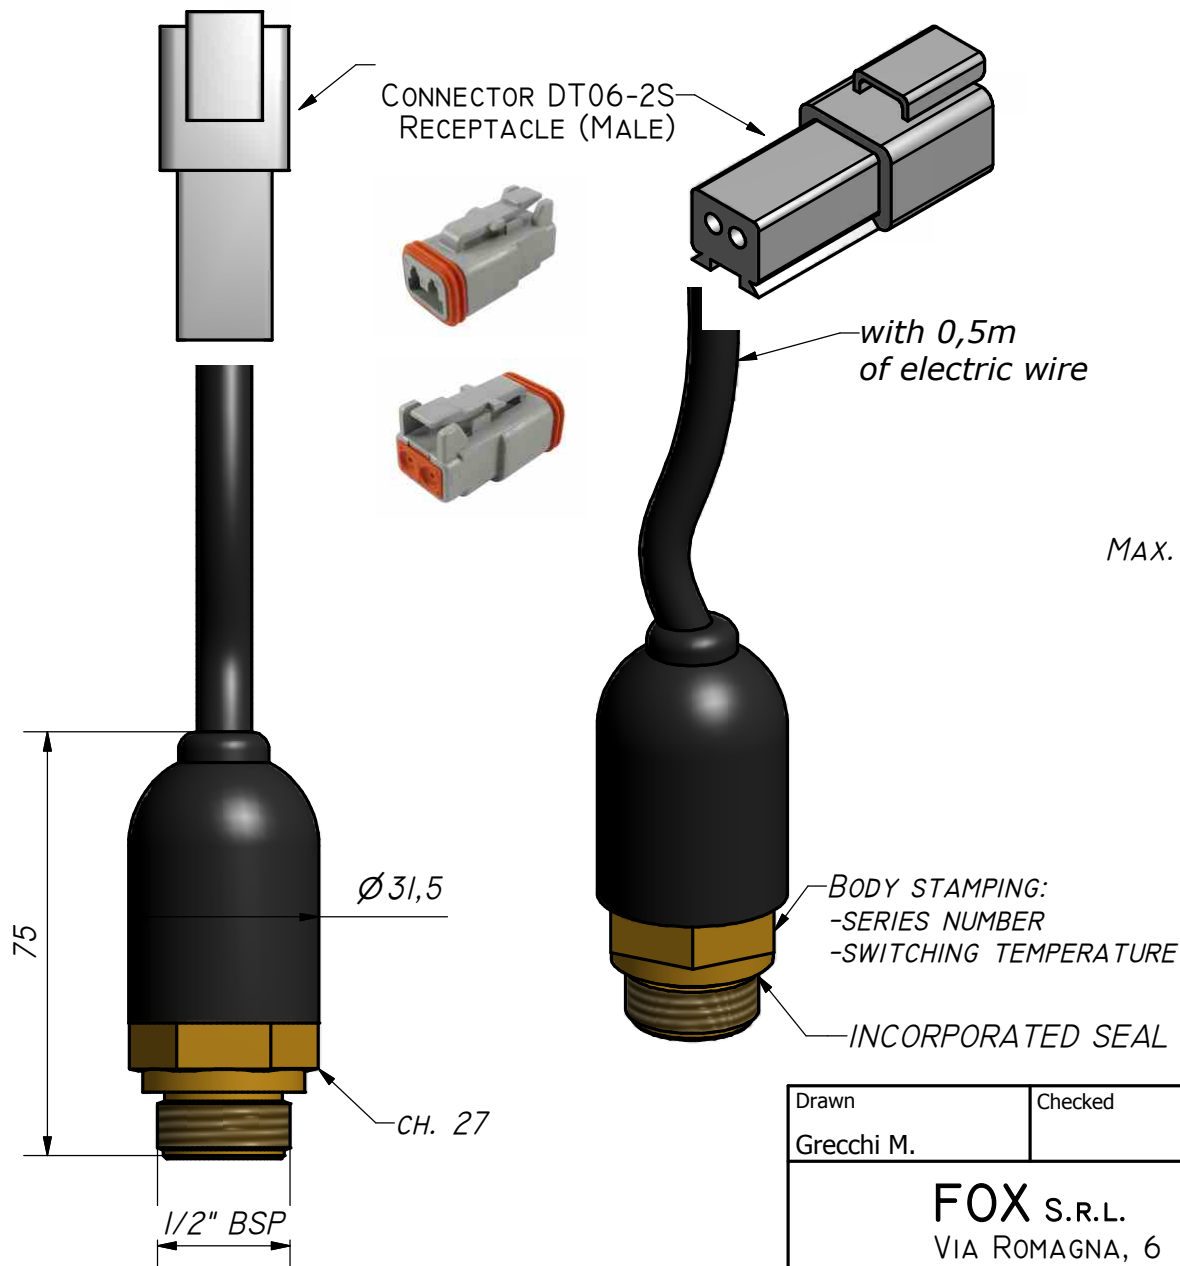

TECHNICAL FEATURES

BODY: IN BRASS
FIX SET SWITCHING: 70°C
MAX. WORKING PRESSURE: 200[BAR]
HYDRAULIC CONNECTION: 1/2"BSP
WORKING TEMPERATURE: FROM -20°C TO 120°C
SWITCHING FREQUENCY: 20 CICLES/MIN
SWITCHING ACCURACY: 3.5°C
FIXED HYSTERESIS VALUE: ~12° OF SETTED VALUE
WEIGHT: ~0.25[Kg]

ELECTRIC FEATURES

ELECTRIC PROTECTION: DIN 40050 : IP 67
MAX. ELECTRIC LOAD ON CONTACTS: 220[V]AC - 10[A]
125[V]AC - 15[A]
24[V]DC - 5[A]
12[V]DC - 10[A]
CONTACTS TYPE: SIMPLE CONTACTS NC

FOX CODE: **TM47C1/DT062S**

NORMALLY CLOSED CONTACT
0,5m CABLE WITH CONNECTOR DT06-2S

Drawn	Checked	Approved	Date	Date	
Grecchi M.				03/07/2015	
FOX S.R.L. VIA ROMAGNA, 6 OPERA - MI - ITALY			THERMOSTAT TM47C1/DT062S		
			TM47C1-DT062S	Edition	Sheet 1 / 1