


# TEMPERATURE SWITCH MODEL XT5

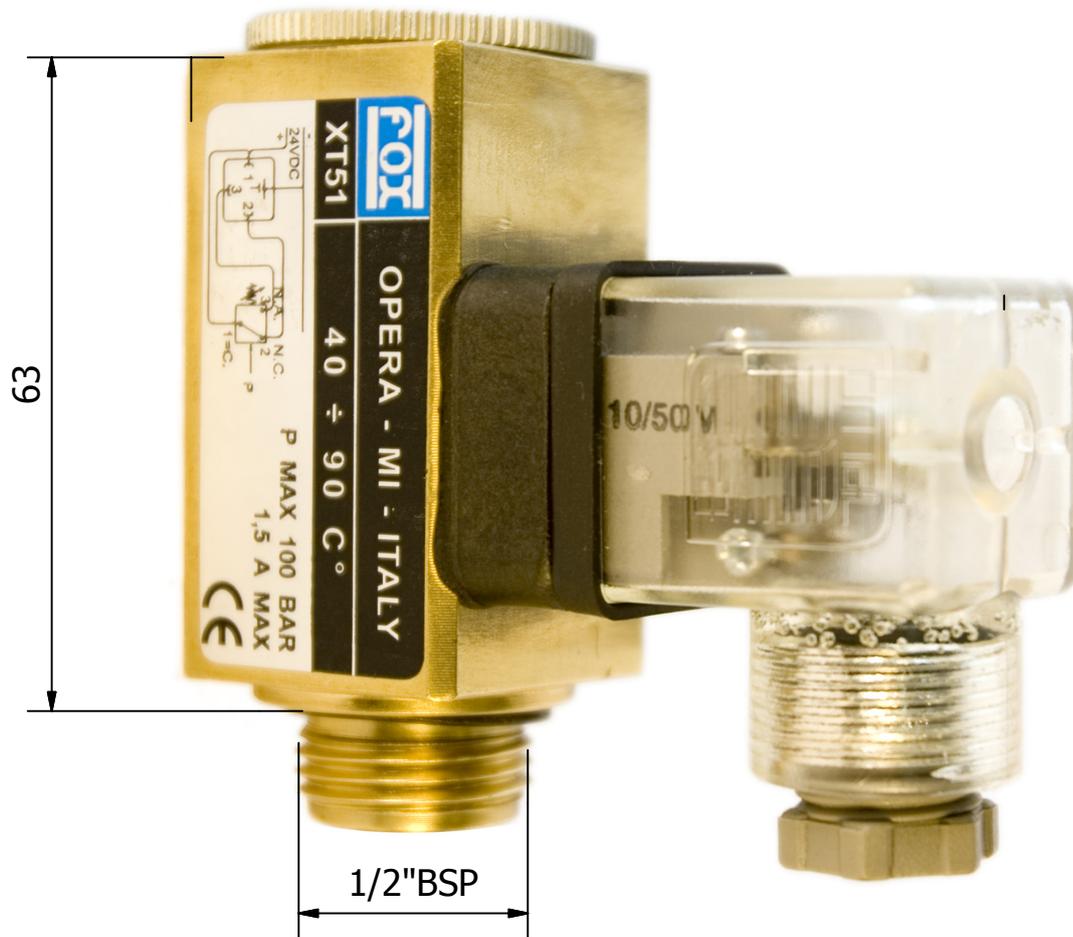


## TECHNICAL FEATURES

Body. square 30 in brass  
 Hydraulic connection: 1/2"BSP  
 Working temperature: from -20°C to 80°C  
 Switching frequency: 30 cycle/min max  
 Switching accuracy: +/- 30% of setted value  
 Hysteresis value: adjustable, std setting 5°C  
 Weight: 0.2 kg

## ELECTRICAL FEATURES

Power supply: 24VDC  
 Electric connection: DIN 43650  
 Electric protection: DIN 40050 : IP65  
 Max load: 1.5 A

|  |  |  |   |                             |                 |
|--|--|--|---|-----------------------------|-----------------|
| CAD ref.:  | Drawn:   | Date   | Name:   | DESCRIPTION:                | SCALE:          |
|  | Checked:   | 07/10/2008   | M.Messina   |                             |                 |
|  | Approved:  |  |   |                             |                 |
| ALL DIMENSION ARE IN<br>MILLIMETER EXCEPT<br>WHERE OTHERWISE NOTED | Projection:ISO128<br> | FOX S.r.l.<br>Via Romagna 6<br>20090 Opera (MI)<br>ITALY |  | DRAWING No/FILE NAME<br>XT5 | SHEET<br>1 of 1 |